



Product Description:

Aussie GMP self priming centrifugal engine drive semi trash pumps in 2", 3" and 4" configurations, designed for high and low pressure operations.

Pumps feature big open impellers, non clog design, silicon carbide mechanical seal, stainless steel wear plate and large front opening port to permit cleaning without pipe work disconnection. Flows available to 2600 litres per minute and heads to 35 metres.

Available in cast iron, and 316 grade cast stainless steel, these heavy duty pumps are suitable for a wide range of industrial and agricultural applications.

Stainless steel pumps feature properties of corrosion and abrasion resistance and are suitable for extremely aggressive applications.

Applications:

Cast Iron

- Industrial waste pump out
- Livestock effluent pump out
- Dust suppression
- Tanker pumps
- Fire fighting
- Sump pumping
- mineral processing
- Quarry dewatering

Features

- Heavy duty cast construction
- Open non clog style impeller
- Self primes from 6 metres
- Front mounted clean out port
- Cast iron foot mounting
- Silicon carbide mechanical seal standard, option of Viton or tungsten carbide
- Stainless steel wear plate
- Option of reliable Yanmar diesel or Honda petrol engines

Stainless steel

- Mine tailings dam pump out
- Aggressive water pumping
- Sewage handling
- Acid & solvent pumping
- Industrial food waste

Benefits

- Long trouble free life
- Pumps solids in suspension
- Ready to pump in minimum amount of time
- Pump clean out without pipe work dismantling
- Stable, easy to install
- Flexibility of handled liquids
- Protects pump from wear, cuts operating costs
- Tried and proven with established service networks throughout Australia and the world

Model	Engine	HP	Suct/ Del	Total Head (m)	Capacity (l/m)	Solid size (mm)	Cast Iron CAT number	SS CAT number
B2KQ-A/ST	Honda GX200	6.5	2" x 2"	26	570	19		AA2B
B2KQ-A/ST	Yanmar diesel L48 recoil & electric start	4.8	2" x 2"	26	570	19		AA2B
B3XR-A/ST	Honda GX390E	13	3" x 3"	40	1350	20	AA9R	-
B4KQ-A/ST	Honda GX 390E	13	4" x 4"	21	1500	35	AAR9	-
B4KQ-A/ST	Yanmar diesel L100E	10	4" x 4"	21	1500	35	AAR9	-


E at end of engine model denotes electric start.






Model Numbers: **GMP Engine Drive Semi Trash Pumps**

Dimensions:

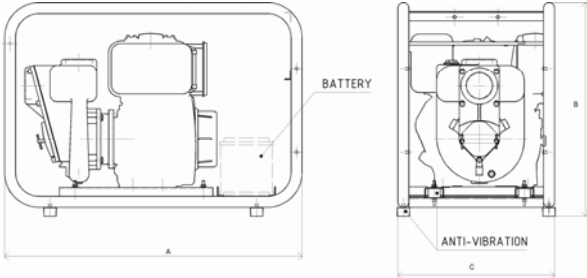


Model	Engine	Length A (mm)	Height B (mm)	Width C (mm)	Weight (kg)
B2KQ-A/ST	Honda GX200	540	505	450	30
B2KQ-A/ST	Yanmar diesel L48	540	505	450	35
B3XR-A/ST	Honda GX390E	670	600	500	50
B4KQ-A/ST	Honda GX 390	760	680	560	65
B4KQ-A/ST	Yanmar diesel L100	950	690	500	75

Performance Curve:

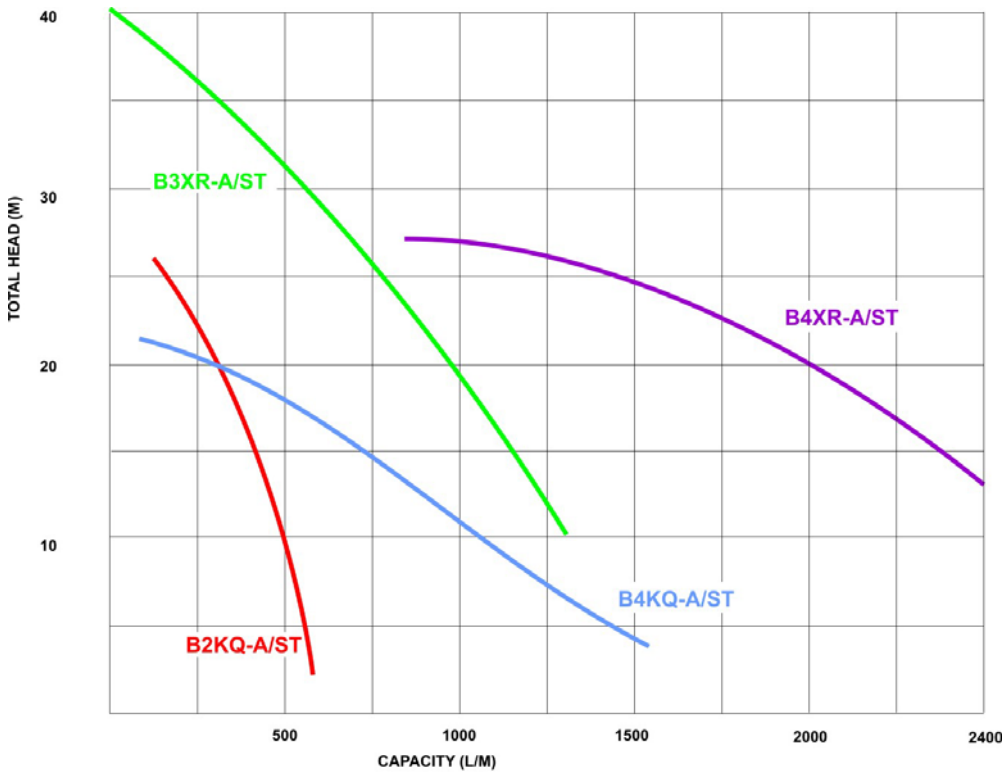

Optional Accessories:

- Heavy duty galvanised roll frame (standard on diesel drive)
- Heavy duty suction hoses 2" and 3"
- Medium pressure lay flat delivery hose, working pressure 100 psi
- High flow diesel transfer fuel nozzle
- Carbon ceramic, silicon carbide, tungsten carbide or Viton seals available
- Strainers and couplings

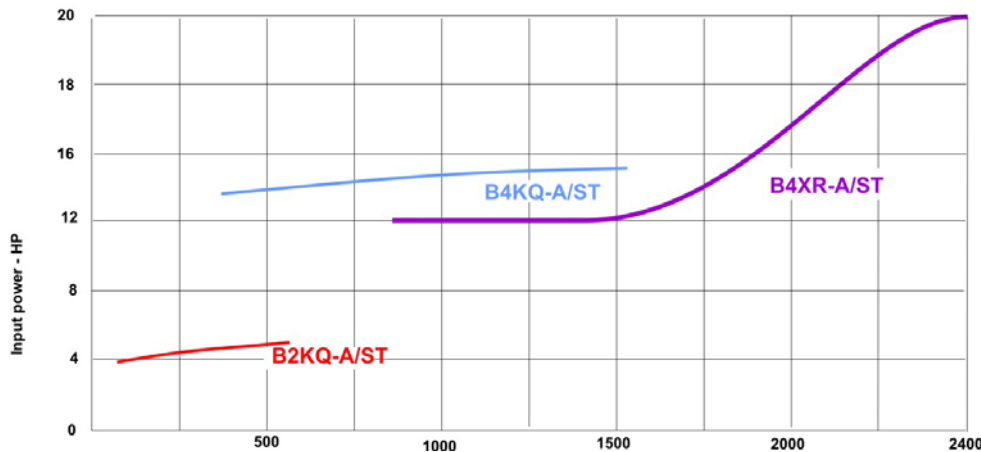

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.