

Model Numbers: **GMP Engine Drive Corrosion Resistant Transfer Pumps**



Aussie GMP self priming centrifugal pumps are available with a close coupled diesel engine for a wide range of applications.

Available in either Ni Al bronze or 316 grade stainless steel configurations they are suitable for both high flow and high pressure tasks.

The pumps are driven by top quality Yanmar or Kohler diesel drive units. All engines offered are top quality international brands, sold and supported by a worldwide service network and backed by two year engine manufacturer's warranty.

Stainless steel pumps are corrosion and abrasion resistant and suitable for extremely aggressive liquid applications.

Applications:

Zinc free bronze

- Deck wash down
- Bilge pump out
- Salvage pump
- Marine fire fighting
- Aquaculture

Cast 316 Stainless steel

- Aggressive water pumping
- Sewage handling
- Acid & solvent pumping
- Agricultural chemical transfer

Features

- Heavy duty cast construction
- Big open impeller
- Self primes from 6 metres
- Replaceable suction cover
- Available with either Honda petrol or for diesel drive either Yanmar or Kohler air cooled units
- Cast iron foot mounting
- Carbon ceramic mechanical seal standard, option of Viton, silicon carbide, tungsten carbide

Benefits

- Long trouble free life
- Pumps small solids in suspension
- Ready to pump in minimum amount of time
- Easy to replace, easy access to check valve for servicing
- Tried and proven with established service networks throughout Australia and the world
- Stable, easy to install
- Flexibility of handled liquids




Ni Al bronze ... corrosion resistant

Model	CAT no.	Engine	HP	rpm	Suct/ Del	Total Head (m)	Max Capacity (l/m)	Weight (kg) (electric start version)	Frame Dimensions (WxLxH) mm
G2TMK-A/B	AA1C	YANMAR L100E	10	3000	2" x 2"	34	400	82	560x680x760
B2KQ-A/B	AA3B	YANMAR L48(E)	4.8	3000	2" x 2"	19	450	50	445x510x550
B3KQ-A/B	AA4B	YANMAR L70(E)	7	3000	3" x 3"	16	840	63	560x680x760
B4KQ-A/B		YANMAR L100E	10	3000	4" x 4"	15	1650	100	560x680x760

Stainless steel ... corrosion & abrasion resistant

Model	CAT no.	Engine	HP	rpm	Suct/ Del	Total Head (m)	Max Capacity (l/m)	Solid size (mm)	Weight (kg) (electric start version)	Frame Dimensions (WxLxH) mm
B2KQ-A/ST X	AA2B	YANMAR L48(E)	4.8	3000	2" x 2"	20	440	16	50	445x510x550
B3XR-A/X	AA2C	YANMAR L100E	10	3000	3" x 3"	24	1250	24	100	560x680x760
B4XR-A/X		KOHLER	23	3000	4" x 4"	31	2100	32		tba

Model Numbers: **GMP Engine Drive Corrosion Resistant Transfer Pumps**

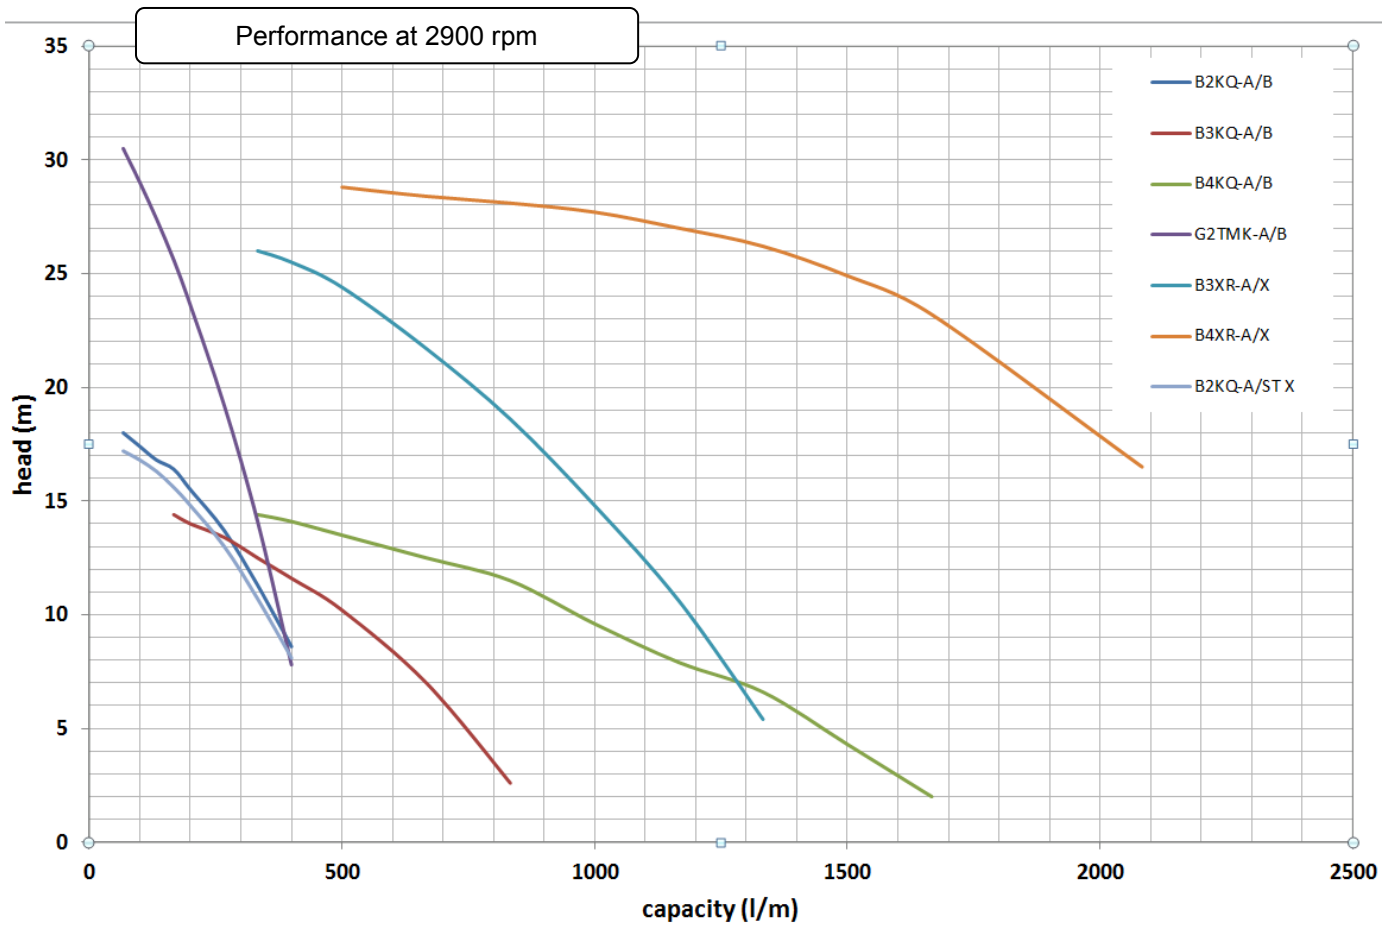

Curves should be used as a guide only, for detailed performance curves contact Aussie Pumps

Optional Accessories:

- Heavy duty galvanised roll frame (standard on diesel drive)
- Heavy duty suction hoses 2" and 3"
- Medium pressure lay flat delivery hose, working pressure 100 psi
- High flow diesel transfer fuel nozzle
- Carbon ceramic, silicon carbide, tungsten carbide or Viton seals available

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.