

FIVE YEAR PUMP END WARRANTY ON ALL AUSSIE QUIK PRIME PUMPS



Rugged trash pumps in 2", 3" and 4" with flows to 1800 litres per minute, heads to 27 metres and suction lift to 7.6 metres. Pumps feature unique mechanical seals that outlast conventional seals by up to six times, a big front mounted cleanout port that enables pumps to be purged of debris without disconnecting pipe work, and high SG, cast iron, non clog style, open impeller and volute system designed to pump solids and resist wear.

Applications:

- Construction site dewatering
- Waste water handling
- Effluent pump out
- Livestock waste water disposal
- Solid laden mine waste pump out

Features

- Five year pump end warranty
- Big non clog open style impeller
- High SG grade cast iron impeller volute
- Front mounted clean out port

- Super robust aluminium body
- Full carry frame
- Genuine Honda engines used with all models with oil alert and low oil protection
- Coupling and strainer kit included as standard options

- Diesel drive options with Yanmar or Kubota engines (see separate spec sheet)

Benefits

- » Great quality ... use with confidence
- » Pumps solids in suspension
- » Resists wear and abrasion
- » Makes pump chamber clearance easy, no dismantling of pump body or pipe work
- » Corrosion resistant, long life
- » Protects pump, facilitates transport on site
- » Tried and proven with established service networks throughout the world
- » Convenience and cost savings

- » Economy and longevity

Specifications

Model	Engine	Type	Engine model	HP	Max Head (m)	Max Flow (lpm)	Suction port	Discharge port	Self primes to (m)	Max solid size	
QP203T	Honda	4 Stroke	Petrol	GX160	5.5	27	630	2"	2"	7.3	0.75"
QP300T	Honda	4 Stroke	Petrol	GX160 or GX200E	5.5, 6.5	27	650	3"	3"	7.4	0.75"
QP301T	Honda	4 Stroke	Petrol	GX240 or GX270E	8, 9	27	1200	3"	3"	7.5	1"
QP40T	Honda	4 Stroke	Petrol	GX390E	13	24	1650	4"	4"	7.6	1.5"

NOTE: Aussie stock codes for QP pumps are determined by using the pump & engine model, for example QP300T/GX200E is the 6.5HP Honda, electric start version of the QP300T



Five Year Warranty:

Aussie Quik Prime pumps carry a unique pump end five year warranty. The products are guaranteed to be free of faulty workmanship or material for a period of five years after the date of sale to the end user.



Only top quality genuine brand engines by reputable manufacturers are used. A 3 year Honda year GX engine warranty applies, administered by the Honda international service network.



Quality ISO 9001
 SAI GLOBAL


Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.

FIVE YEAR PUMP END WARRANTY ON ALL AUSSIE QUIK PRIME PUMPS

Construction:

Front case	Marine grade aluminium
Volute	High SG grade cast iron
Back plate	Marine grade aluminium
Mechanical seal	Silicon carbide
Outlet	Marine grade aluminium
Casing bolts	Zinc plated steel
Check valve	Nitrile rubber
Priming & drain plugs	Polycarbonate
Casing, priming & drain plug orings	Nitrile rubber
Finish	Brushed aluminium
Impeller	High SG grade cast iron, non clog, open type

Dimensions:

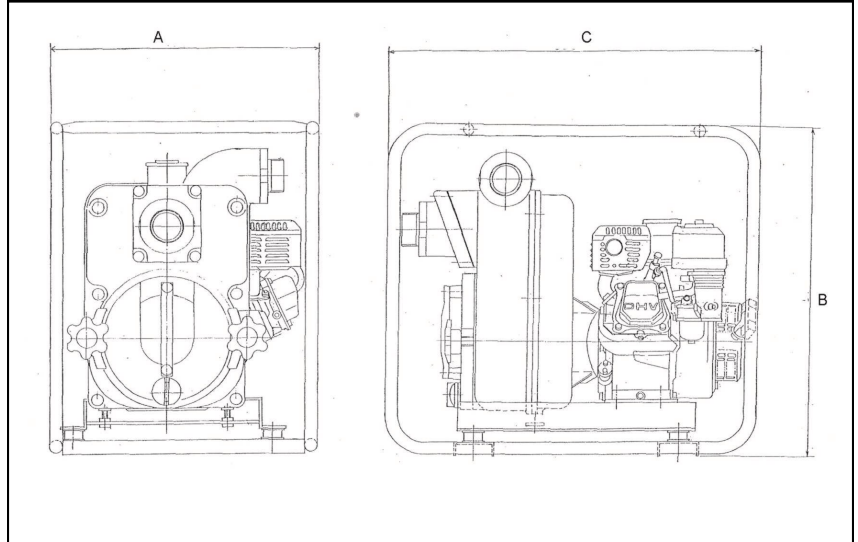

Standard Accessories:

- Coupling kit and strainer
- Full frame

Optional Accessories:

- Heavy duty suction hose
- Medium pressure lay flat delivery hose
- Yanmar, Robin or Kubota air cooled diesel engine drive available
- Full galvanised roll frame provided as standard equipment on all diesel engine drive versions or available for corrosive or extreme applications
- Electric start options
- Camlock couplings
- Hydraulic drive option


Model	Width A (mm)	Height B (mm)	Length C (mm)	Weight (kg)
QP203T	471	576	589	35
QP300T	506	576	637	35
QP301T	493	646	656	70
QP40T	recoil 602 electric start 642	734	701	90 95



QP301T/GX240



QP40T/GX390

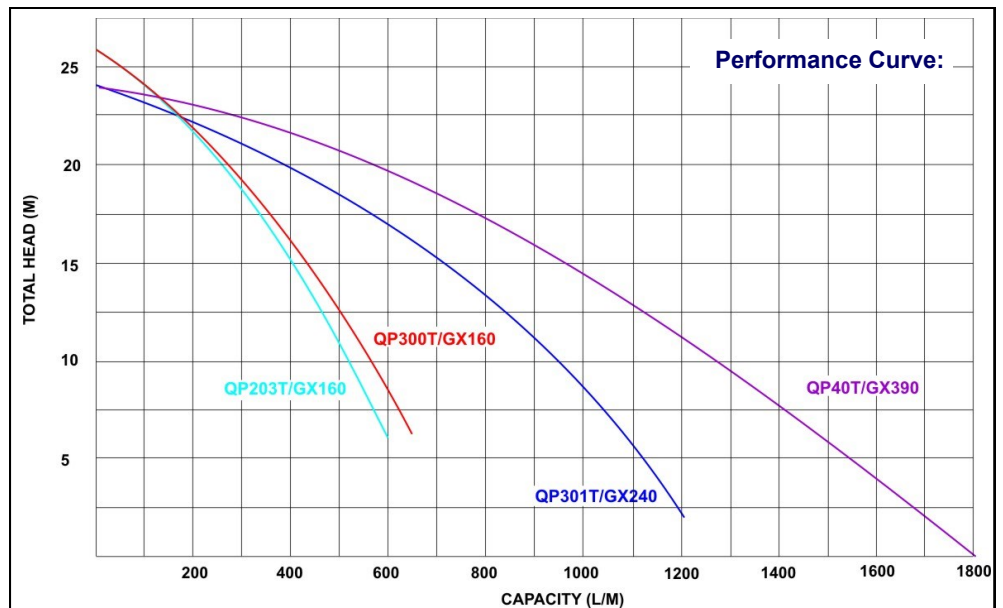

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.