



**FIVE YEAR PUMP END WARRANTY ON ALL AUSSIE QUIK PRIME PUMPS**

**AUSSIE QUIK PRIME DIESEL DRIVE TRASH PUMPS**

Model Numbers: **QP203T**    **QP301T**  
**QP300T**    **QP40T**



QP40T/GD411

**Features**

- Five year pump warranty
- Big non clog open style impeller
- High SG impeller volute
- Front mounted clean out port
- Super robust aluminium body
- Full carry frame
- Honda, Yanmar or Kubota diesel engines
- Coupling and strainer kit included as standard options
- Honda petrol drive options available (see separate spec sheet)

**Specifications**

Model	Engine Brand	Engine model	HP	Max Head (m)	Max Flow (lpm)	Suction port	Discharge port	Self primes to (m)	Max solid size
QP203T	Yanmar	L48 or L48E	4.8	27	600	2"	2"	7.3	0.75"
	Kubota	AC60	6.0						
QP300T	Yanmar	L48 or L48E	4.8	27	650	3"	3"	7.4	0.75"
	Kubota	AC60	6.0						
QP301T	Honda	GD411E	9	24	1200	3"	3"	7.5	1"
	Yanmar	L70E	7.0						
	Kubota	OC95E	9.5						
QP40T	Honda	GD411E	9	24	1800	4"	4"	7.6	1.5"
	Yanmar	L100E	10.0						
	Kubota	OC95E	9.5						

**Product Description:**

Rugged diesel drive trash pumps in 2", 3" and 4" with flows to 1800 litres per minute, heads to 27 metres and suction lift to 7.6 metres. Pumps feature unique mechanical seals that outlast conventional seals by up to six times, a big front mounted cleanout port that enables pumps to be purged of debris without disconnecting pipe work, and high SG, cast iron, non clog style, open impeller and volute system designed to pump solids and resist wear.

**Applications:**

- Construction site dewatering
- Waste water handling
- Effluent pump out
- Livestock waste water disposal
- Solid laden mine waste pump out

**Benefits**

- Great quality ... use with confidence
- Pumps solids in suspension
- Resists wear and abrasion
- Makes pump chamber clearance easy, no dismantling of pump body or pipe work
- Corrosion resistant, long life
- Protects pump, facilitates transport on site
- Tried and proven with established service networks throughout the world
- Convenience and cost savings



**Five Year Warranty:**

Aussie Quik Prime pumps carry a unique pump end five year warranty. The products are guaranteed to be free of faulty workmanship or material for a period of five years after the date of sale to the end user.

Only top quality genuine brand engines by reputable Japanese manufacturers are used. A two year engine manufacturer's warranty applies, administered by the engine manufacturer or it's duly appointed representative. All engines used by Australian Pump Industries are major international brands, serviced and supported not only in Australia and South Pacific but right throughout the world.

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.





**FIVE YEAR PUMP END WARRANTY ON ALL AUSSIE QUIK PRIME PUMPS**


**AUSSIE QUIK PRIME DIESEL DRIVE TRASH PUMPS**

Model Numbers: **QP203T**    **QP302T**  
**QP300T**    **QP40T**

**Construction:**

Front case	Marine grade aluminium
Volute	Marine grade aluminium
Back plate	Marine grade aluminium
Mechanical seal	Carbon/ceramic
Outlet	Marine grade aluminium
Casing bolts	Zinc plated steel
Check valve	Nitrile rubber
Priming & drain plugs	Polycarbonate
Casing, priming & drain plug orings	Nitrile rubber
Finish	Brushed aluminium
Impeller	Cast iron, open type

**Dimensions:**

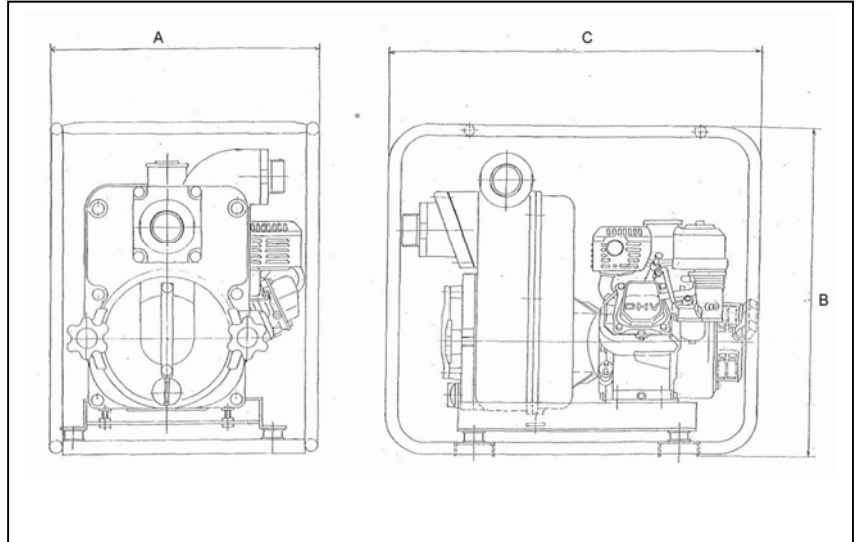

**Standard Accessories:**

- Coupling kit and strainer
- Full frame


**Optional Accessories:**

- Heavy duty suction hose
- Medium pressure lay flat delivery hose
- Full galvanised roll frame provided as standard equipment on all diesel engine drive versions or available for corrosive or extreme applications
- Electric start options
- Camlock couplings
- Hydraulic drive option

Model	Engine	A Width (mm)	B Height (mm)	C Length (mm)	Weight (kg)
QP203T	L48	470	575	660	65
QP300T	L48	470	575	660	65
QP301T	L70	493	638	656	78
QP40T	L100	602	725	691	115



QP203T L48 (shown without 2" reducing nipple)

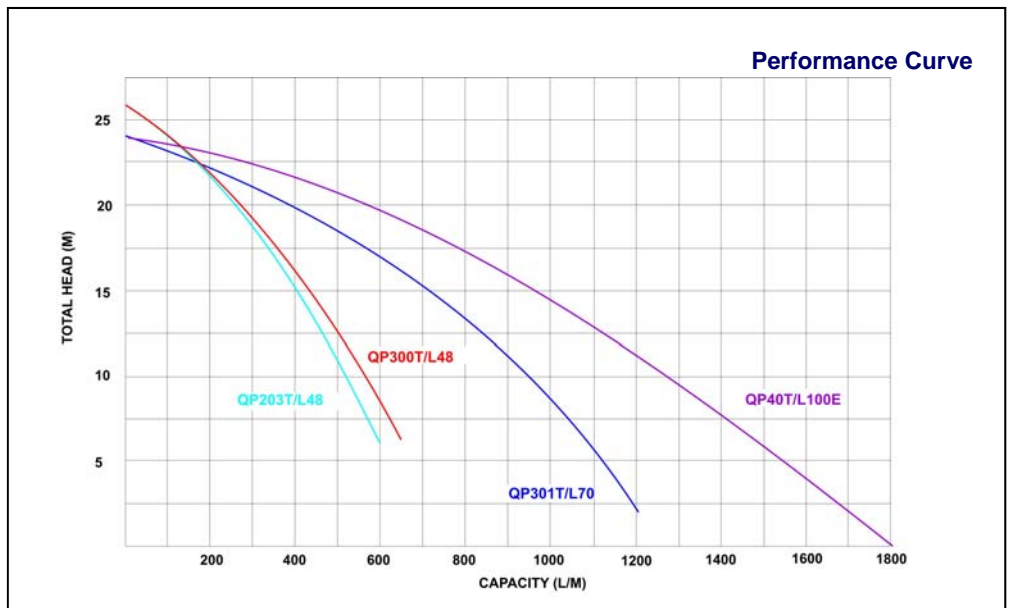

Performance data and curves are to be taken as a guide only