

AUSSIE GMP PUMPS ENGINE DRIVE ... 3 YEAR PUMP WARRANTY



Tanker special, B3XRA GX390, no frame, includes base plate

Aussie GMP 2", 3" and 4" self priming centrifugal engine drive pumps designed for high and low pressure operations.

Semi trash versions feature big open impellers, non clog design, silicon carbide mechanical seal, stainless steel wear plate and large front opening port to permit cleaning without pipe work disconnection.

Ni Al bronze & cast 316 stainless steel options also available, see separate spec sheet.

These heavy duty pumps are suitable for a wide range of industrial and agricultural applications.

Features

- Heavy duty cast construction
- Big open impeller
- Self primes from 6 metres
- Front mounted clean-out port
- Available with either Honda petrol or, Yanmar or Hatz diesel drive units
- Galvanised base plate
- Silicon carbide/alumina mechanical seal faces with nitrile rubber seals standard on cast iron trash pumps
- Stainless steel wear plate

Benefits

- » Long, trouble free life
- » Pumps solids in suspension
- » Ready to pump in minimum amount of time
- » Pump clean out without dismantling pipe work
- » Tried and proven with established service networks throughout Australia and the world
- » Stable, easy to install
- » Wear resistant for longevity
- » Protects pump from wear, cuts operating costs

Applications:

- Industrial waste pump out
- Livestock effluent pump out
- Dust suppression
- Tanker pumps
- Fire fighting
- Sump pumping
- Mineral processing
- Quarry dewatering

Specifications

	Inlet/Outlet	Model	CAT no.	Engine	HP	RPM	Total Head (m)	Capacity (l/m)	Solid size (mm)
PETROL DRIVE	Cast iron trash pumps								
	3" x 3"	B3XR-A/ST Tanker special (no frame)	AA6A	HONDA petrol	13	3600	40	1250	20
DIESEL DRIVE	Cast iron trash pumps								
	3" x 3"	B3KQ-A/ST	AA5B	YANMAR e/start	7	3000	16	900	27
	4" x 4"	B4KQ-A/ST	AA3S	YANMAR e/start	10	3000	21	1500	35
	3" x 3"	B3XR-A/ST	AA6A	HATZ e/start	11	3600	40	1250	20

Optional Accessories:


- Heavy duty galvanised roll frame (standard on diesel drive)
- Heavy duty suction hoses 2" and 3"
- Medium pressure lay flat delivery hose, working pressure 100 psi
- High flow diesel transfer fuel nozzle
- Carbon ceramic, silicon carbide, tungsten carbide or Viton seals available
- Strainers and couplings
- Battery pack for electric start models

Call for details on other options available



Quality ISO 9001
SAI GLOBAL

AUSSIE GMP PUMPS ENGINE DRIVE ... 3 YEAR PUMP WARRANTY

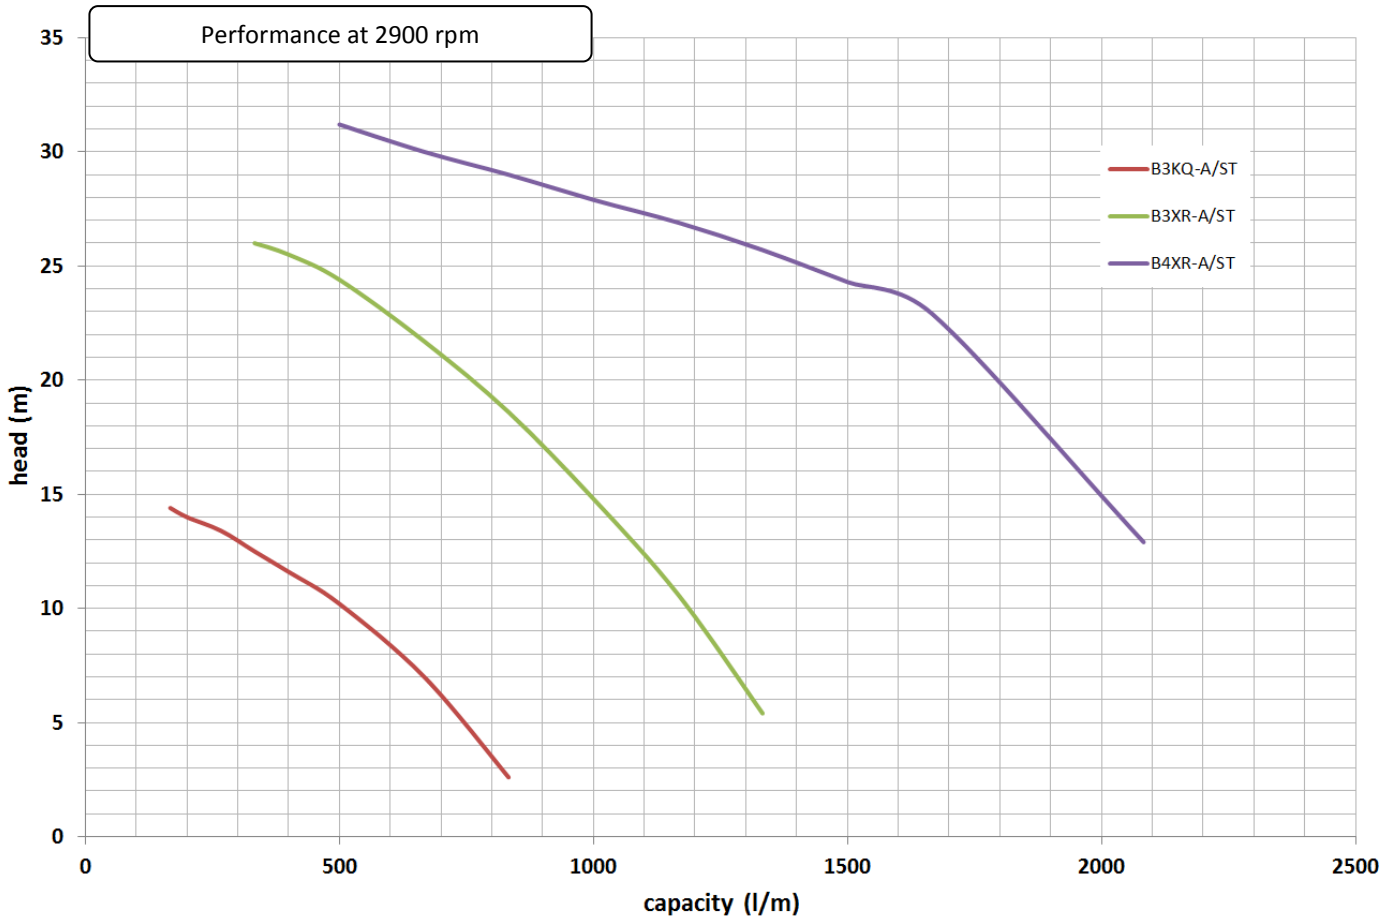

Curves should be used as a guide only, for detailed performance curves contact Aussie Pumps